JET SKI® ULTRA® 160LX-S





Enganche

aceite

carga

Colores

Garantía

disponibles

Capacidad de

Depósito de

combustible

Capacidad de

Capacidad de





Direct drive from engine

5.8 qt

21.1 gal

496 lb

44.5 gal

POTENCIA

4-stroke, DOHC, 4 valves per cylinder, 4-cylinder Motor

Cilindrada 1,498cc

Diámetro por 83.0 x 69.2mm carrera

Relación de 10.6:1 compresión

Inducción Naturally aspirated

Impulso máximo N/A

Refrigeración Sistema de

DFI® with 60mm throttle body

Inducted water

combustible

Encendido TCBI with digital advance

Arranque Electric

Sistema de propulsión 155mm jet pump, axial-flow, single stage

Hélice

3-blade, oval-edge stainless steel


Electronic Rider

Power Modes, Kawasaki Smart Reverse with


Deceleration (KSRD)

Lubricación Semi-dry sump system

RENDIMIENTO





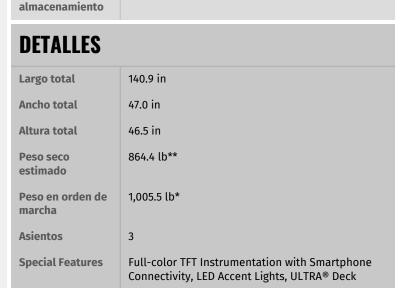

Metallic Bluish Gray/Ebony

12 Month Limited Warranty

*Curb weight includes all necessary materials and fluids to operate correctly, full tank of fuel (more than 90 percent capacity) and tool kit (if supplied) **Dry weight does not include all necessary materials and fluids to operate correctly, full tank of fuel (more than 90 percent capacity) and tool kit (if supplied). KAWASAKI CARES: Ride responsibly. Kawasaki believes safety begins with us and continues with you. Always wear a USCG-approved personal flotation device, eyewear, gloves, footwear, and a wet suit or clothing that provides equivalent protection (board shorts with neoprene liner). Never ride under the influence of drugs or alcohol. Respect the rights of shoreline residents and other marine recreationists. Boat smart from the start. Take a Boating Safety course; for more information visit www.USCGBoating.org. Jet Ski watercraft are inboard powerboats and their use is subject to all applicable federal, state, and local boating laws. Read Owner's Manual and all on-product warnings. ©2025 Kawasaki Motors Corp., U.S.A. Specifications subject to change. Visite panama.kawasaki-la.com para obtener detalles completos del producto.